



Visual



Acoustic



Technical Data

Weight: approx. 210g
Size: 76x88x225mm


Voltage: 24V~264V AC/DC
Standby power: 23mA@120Vac
Sound Output: MAX. 90dB
Protection degree: IP65

Operating and storage temperature: (-20°C)~(+55°C) / (-40°C)~(+65°C)
Housing material: PC-ABS / PC

Adjustable installation angle
Adjustable brightness




Wide range of input voltage
from 24~264V AC/DC

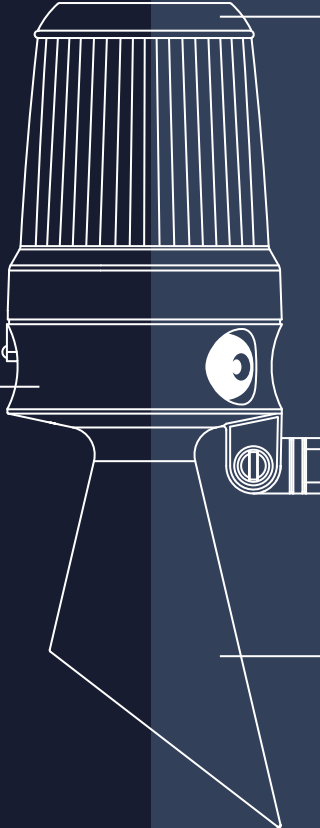

Adjustable volume
Multiple visuals and tones




2 Inputs available with
different visuals and tones

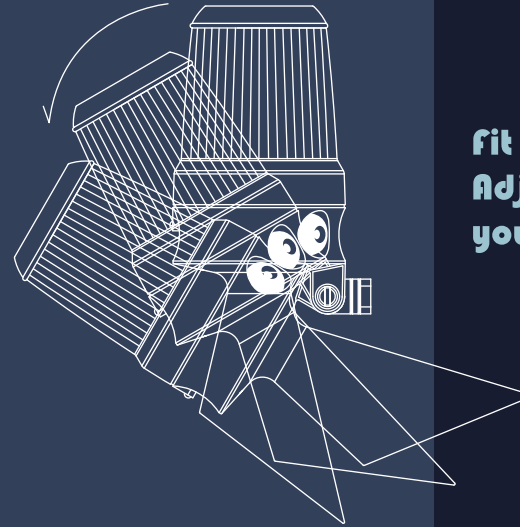

fit you well!
Adjust the angle
you want!

the only difference
from TA3-W

Transmitter sends signal to receiver
and LED horn simultaneously.
No need to pack with equipment by messy wire.
Just find a place, then plug and play!

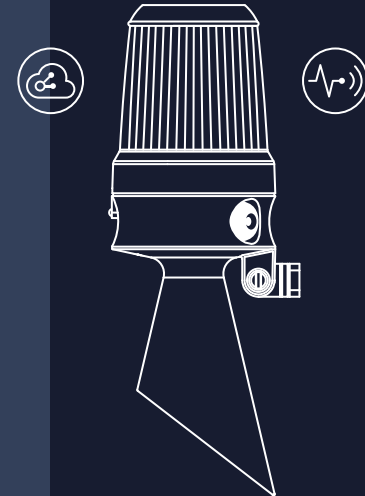



+55 41 3015-7953

Rua Afonso Fruet, 131 | Curitiba/PR | Brasil

contato@juuko.com.br | www.juuko.com.br

 /juukobrasil

 /company/juuko-brasil

 /juukobrasil